



inoteska

BRIMUX BRI S0



Product code:

ITX48212 BRIMUX 12xS0
ITX48214 BRIMUX 4xS0
ITX48214.1 BRIMUX 4xS0, 2xX.21
ITX48214.2 BRIMUX 4xS0, 2xUDI
ITX48215 BRIMUX 8xS0
ITX48215.1 BRIMUX 8xS0, 2xX.21
ITX48215.2 BRIMUX 8xS0, 2xUDI
ITX48216 BRIMUX 16xS0
(UDI-universal data interface)

Features:


- multiplexer 1xE1 and up to 16xBRI S0
- dynamic (statistic) concentration of voice calls on BRI
- calls routing BRI-BRI or BRI-PRI and vice versa
- dynamic configuration

- PRI E1 G704 (120 Ohm, RJ 45) ISDN DSS1signalling
- BRI S/T-2B1Q (100Ohm, RJ 45) point to point, ISDN DSS1 signalling
- optional data interface (2x): X21/ V35/ V36/ RS530/ RS232

- static crossconnect of any E1 timeslots or data interfaces (DACCs)
- calls routing based on specified criteria
- analysis and adjustment of called and calling party number
- parameters change of called and calling party number

- desktop or rack (max. 8 cards) version
- local configuration from PC via V.24(RS232) interface
- remote configuration using internal ISDN modem
- possibility to save the set parameters (configuration) to PC
- possibility to change firmware - upgrade
- cooperation with supervision centre

Applications:

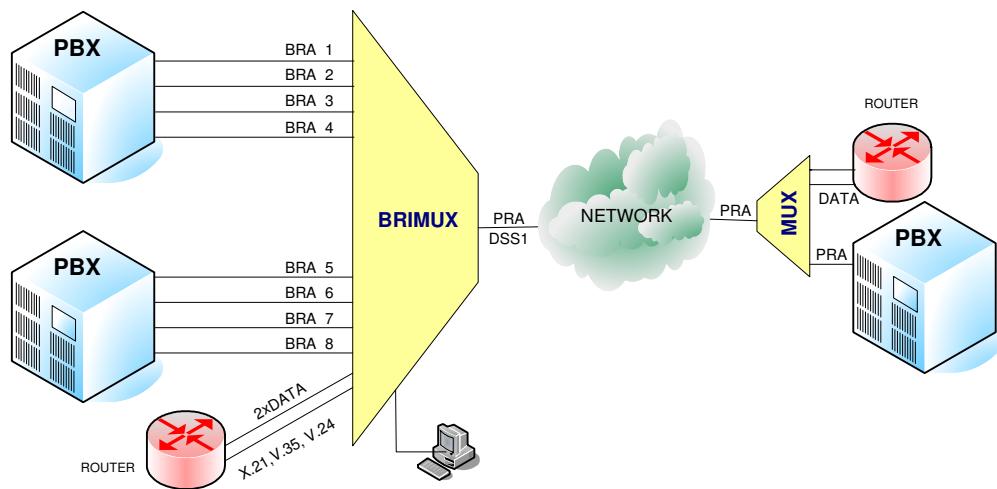

Dimensions:

43.5 x 237 x 220 mm (h x w x d)